THIS DRAWING IS A CONTROLLED DOCUMENT.

DWG NO

USED ON

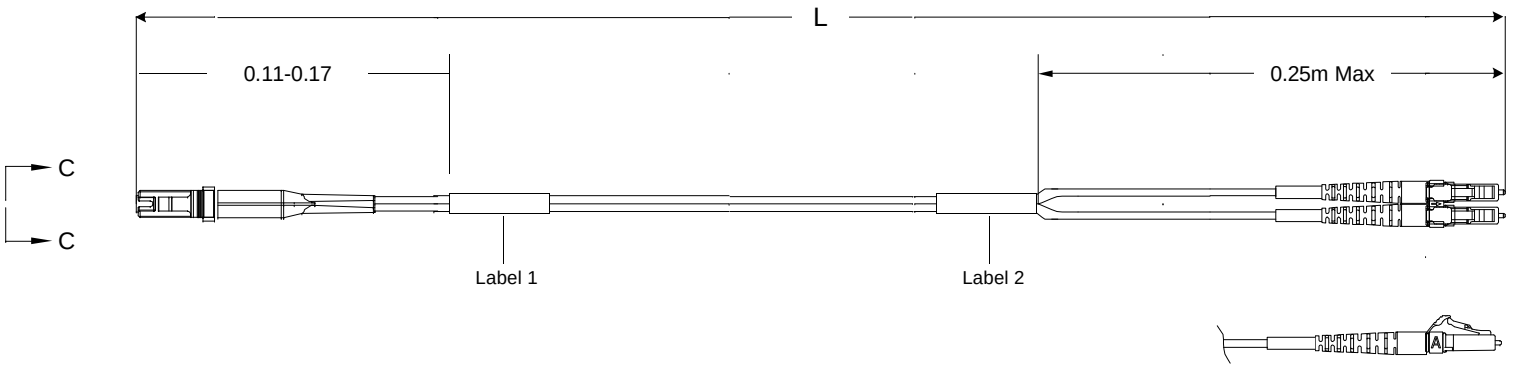

Left Side

Connector(s): MT-RJ SECURE (No Pins)
Mode: MM
Housing Color: Violet
Geom. Spec: 115-1215



VIEW C-C
NOT TO SCALE

Fiber Path

Fiber A - ——— - B
Fiber B - ——— - A

Right Side

Connector(s): LC-Duplex
Mode: MM
Housing Color: Beige
Geom. Spec: N/A

Notes:

1 IL tested at 1300nm.
2 Product and Processing must meet requirements of Tyco Electronics Standard 230-702
3 Label 2 will not be present on any cable assembly less than 5 meters long.
4 Includes dust caps (not shown on print).

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES, AND MAY NOT BE REPRODUCED, USED, OR DISCLOSED EXCEPT AS AUTHORIZED IN WRITING BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS IN THE INFORMATION ARE RESERVED BY TYCO ELECTRONICS CORPORATION. UNPUBLISHED - RESTRICTED RIGHTS OF THE LAW. THIS WORK CONTAINS THE CONFIDENTIAL AND PROPRIETARY INFORMATION AS NOTED. ACCESS IS PERMITTED ONLY TO AUTHORIZED PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA USA.

LOC CE
DIST 16

CAC Customer Layout Rev: D

P	LTR	REVISION RECORD	DATE	DWN	APVD
	A	Rev Per EC# RELEASE	3/31/2008	-	JD

DIMENSIONS: meters

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC # -
1 PLC # -
2 PLC # -
3 PLC # -
4 PLC # -

Restricted To:

DWN Cable Assy Configurator
CHK Joe Davis
APVD Joe Davis
MATERIAL -
HEAT TREAT -

AMP Tyco Electronics, Inc. Harrisburg, PA 17105-3608

NAME FO C/A - 2 fiber, 62.5/125, OFNR (Riser) jacket, MT-RJ SECURE (No Pins) to LC-Duplex

SCALE NTS | SIZE A2 | DRAWING NO C- 1918691 | SHEET 1 of 3 | REV A

8 7 6 5 4 3 2 1

D C B A

Part #	L (meters)	L (feet)	MT-RJ SECURE (No Pins), Violet IL (dB)	MT-RJ SECURE (No Pins), Violet RL (dB)	LC-Duplex, Beige IL (dB)	LC-Duplex, Beige RL (dB)
0-1918691-1	0.950 - 1.050	3.11 - 3.44	0.5	20	0.5	-
0-1918691-2	1.950 - 2.050	6.39 - 6.72	0.5	20	0.5	-
0-1918691-3	2.950 - 3.050	9.67 - 10.00	0.5	20	0.5	-
0-1918691-4	3.920 - 4.080	12.86 - 13.38	0.51	20	0.51	-
0-1918691-5	4.920 - 5.080	16.14 - 16.66	0.51	20	0.51	-
0-1918691-6	5.920 - 6.080	19.42 - 19.94	0.51	20	0.51	-
0-1918691-7	6.920 - 7.080	22.70 - 23.22	0.51	20	0.51	-
0-1918691-8	7.920 - 8.080	25.98 - 26.50	0.51	20	0.51	-
0-1918691-9	8.850 - 9.150	29.03 - 30.01	0.51	20	0.51	-
1-1918691-0	9.850 - 10.150	32.31 - 33.30	0.52	20	0.52	-
1-1918691-1	10.850 - 11.150	35.59 - 36.58	0.52	20	0.52	-
1-1918691-2	11.850 - 12.150	38.87 - 39.86	0.52	20	0.52	-
1-1918691-3	12.850 - 13.150	42.15 - 43.14	0.52	20	0.52	-
1-1918691-4	13.850 - 14.150	45.43 - 46.42	0.52	20	0.52	-
1-1918691-5	14.850 - 15.150	48.72 - 49.70	0.52	20	0.52	-
1-1918691-6	15.840 - 16.160	51.96 - 53.01	0.52	20	0.52	-
1-1918691-7	16.830 - 17.170	55.21 - 56.33	0.53	20	0.53	-
1-1918691-8	17.820 - 18.180	58.46 - 59.64	0.53	20	0.53	-
1-1918691-9	18.810 - 19.190	61.71 - 62.95	0.53	20	0.53	-
2-1918691-0	19.800 - 20.200	64.96 - 66.27	0.53	20	0.53	-
2-1918691-1	20.790 - 21.210	68.20 - 69.58	0.53	20	0.53	-
2-1918691-2	21.780 - 22.220	71.45 - 72.90	0.53	20	0.53	-
2-1918691-3	22.770 - 23.230	74.70 - 76.21	0.53	20	0.53	-
2-1918691-4	23.760 - 24.240	77.95 - 79.52	0.54	20	0.54	-
2-1918691-5	24.750 - 25.250	81.20 - 82.84	0.54	20	0.54	-
2-1918691-6	25.740 - 26.260	84.44 - 86.15	0.54	20	0.54	-
2-1918691-7	26.730 - 27.270	87.69 - 89.46	0.54	20	0.54	-
2-1918691-8	27.720 - 28.280	90.94 - 92.78	0.54	20	0.54	-
2-1918691-9	28.710 - 29.290	94.19 - 96.09	0.54	20	0.54	-
3-1918691-0	29.700 - 30.300	97.44 - 99.40	0.55	20	0.55	-
3-1918691-1	30.690 - 31.310	100.68 - 102.72	0.55	20	0.55	-
3-1918691-2	31.680 - 32.320	103.93 - 106.03	0.55	20	0.55	-
3-1918691-3	32.670 - 33.330	107.18 - 109.35	0.55	20	0.55	-
3-1918691-4	33.660 - 34.340	110.43 - 112.66	0.55	20	0.55	-
3-1918691-5	34.650 - 35.350	113.68 - 115.97	0.55	20	0.55	-
3-1918691-6	35.640 - 36.360	116.92 - 119.29	0.55	20	0.55	-
3-1918691-7	36.630 - 37.370	120.17 - 122.60	0.56	20	0.56	-
3-1918691-8	37.620 - 38.380	123.42 - 125.91	0.56	20	0.56	-
3-1918691-9	38.610 - 39.390	126.67 - 129.23	0.56	20	0.56	-
4-1918691-0	39.600 - 40.400	129.92 - 132.54	0.56	20	0.56	-
5-1918691-0	49.500 - 50.500	162.40 - 165.68	0.58	20	0.58	-

USED ON

Qty	U of M	Description	Item No.
2	piece	Trace Label	14
2	piece	Eyelet/Shrink tube assembly - White	13
1	piece	MT-RJ TwinZip Bend Limiting Boot, Beige	12
AR	meter	2 fiber, 62.5/125, 1.8 mm, Twinzip, Orange, OFNR (Riser)	11
1	piece	MT-RJ FERRULE, THERMOPLAST,MM	10
2	piece	LC Connector Assy, MM	9
1	piece	LC Duplex clip, black	8
2	piece	LC, SC, FC Straight Boot, Beige	7
1	piece	MT-RJ Keyed Connector Housing - Violet	6
1	piece	CRIMP EYELET, MT-RJ	5
1	piece	MT-RJ, SPRING PUSH, UNIVERSAL	4
1	piece	PIN KEEPER, 3.8MM	3
1	piece	SPRING, MT-RJ, 3.8 DESIGN	2
1	piece	DUST COVER, MT-RJ	1

THIS DRAWING IS A CONTROLLED DOCUMENT.
DWG NO
THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES, AND AFFILIATES. IT MAY NOT BE REPRODUCED, USED, SOLD OR DISCLOSED TO A THIRD PARTY IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN AUTHORIZATION OF TYCO ELECTRONICS CORPORATION.
PSA
FROM TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA

LOC CE
DIST 16

CAC Customer Layout Rev: D

P	LTR	REVISION RECORD	DATE	DWN	APVD
	A	Rev Per EC# RELEASE	3/31/2008	-	JD

DIMENSIONS: meters

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -

Restricted To:

DWN	Cable Assy Configurator
CHK	Joe Davis
APVD	Joe Davis
NAME	FO C/A - 2 fiber, 62.5/125, OFNR (Riser) jacket, MT-RJ SECURE (No Pins) to LC-Duplex
MATERIAL	-
HEAT TREAT	-

AMP Tyco Electronics, Inc. Harrisburg, PA 17105-3608

SCALE	SIZE	DRAWING NO	SHEET	REV
NTS	A2	C- 1918691	2 of 3	A

8 7 6 5 4 3 2 1

D C B A

USED ON

Label 1 Per specification 107-1645-1

Trace # - Bar Code
Trace # - Human Readable
Part Number
Country of Origin

This label is used on all lengths on this drawing.

Label 2 Per specification 107-1645-1

Trace # - Bar Code
Trace # - Human Readable
Part Number
Country of Origin

This label is used on all lengths on this drawing.

THIS DRAWING IS A CONTROLLED DOCUMENT. DWG NO

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES, AND IS NOT TO BE DISCLOSED TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF TYCO ELECTRONICS CORPORATION. IT IS NOT TO BE REPRODUCED, IN WHOLE OR IN PART, OR USED FOR ANY PURPOSE OTHER THAN ITS INTENDED PURPOSE, WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA

LOC	DIST	FSK
CE	16	

CAC Customer Layout Rev: D

P	LTR	REVISION RECORD	DATE	DWN	APVD
A		Rev Per EC# RELEASE	3/31/2008	-	JD

DIMENSIONS: meters

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -

Restricted To:

DWN: Cable Assy Configurator	MATERIAL: -	HEAT TREAT: -	
CHK: Joe Davis	AMP Tyco Electronics, Inc. Harrisburg, PA 17105-3608		
APVD: Joe Davis			
NAME: FO C/A - 2 fiber, 62.5/125, OFNR (Riser) jacket, MT-RJ SECURE (No Pins) to LC-Duplex			
SCALE: NTS	SIZE: A2	DRAWING NO: C- 1918691	SHEET: 3 of 3 REV: A

8 7 6 5 4 3 2 1

D C B A